



| | | | | | | | | | | | | | | | | | | |
|-----------|--------|------------------|--------|-------|--------|---------|----------|------------------|-------|------|------|--------|---------|------------------|--------|-------|--------|---------|
| A4 | ← mm → | LENGTH | 0.5-10 | 10-30 | 30-100 | 100-350 | 350-1000 | RAD./CHAM | 0.5-3 | 3-6 | 6-30 | 30-120 | 120-300 | ANGLE | 0.5-10 | 10-50 | 50-120 | 120-200 |
| | | TOLERANCE | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.8 | TOLERANCE | ±0.2 | ±0.5 | ±1 | ±2 | ±4 | TOLERANCE | ±0.2 | ±0.5 | ±1 | ±2 |

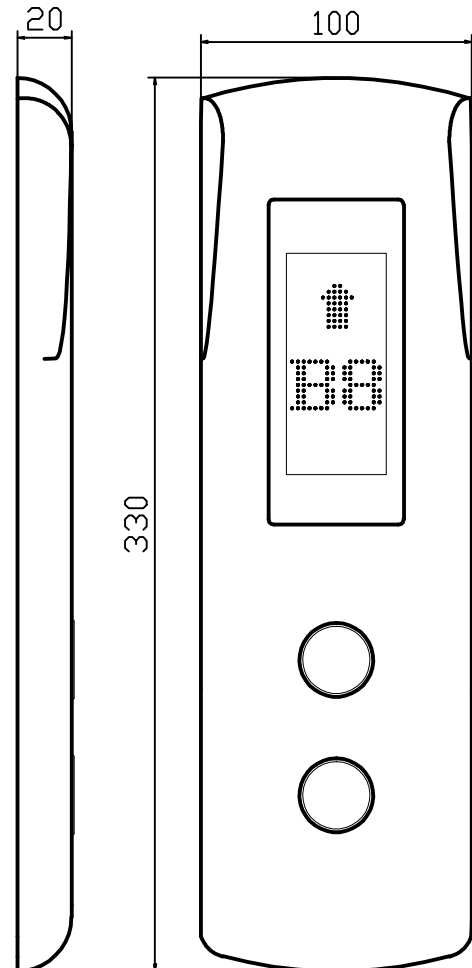

PB62-GS-HB

| | | | | | |
|-------------|---|------------------|--------------------|-------------|-------------|
| 產品名稱 | 圖面 | 審核(APOVE) | 確認(CHECKED) | DATA | PAGE |
| 超薄乘場面板 | 乘場面板示意圖 | LIN | YANG | 2009/09/08 | |
| 產品編號 |  通達機電有限公司 <small>Tung Da Electric Co., Ltd</small> | 繪圖(DRWN) | 圖號(DWG. NO) | | |
| PB62-GS-HB | | CHENG | PBx-x-IND | | |